

1

2

3

4

5

6

A


B

C

D

SELF-LAY SPUR CONNECTION-OPTION "B"

SCENARIO:WHEN EXISTING MAIN IS WITHIN THE NEAR SIDE FOOTPATH AND WHEN SITE BOUNDARY / SLP MAIN IS WITHIN 5m OF TEE CONNECTION

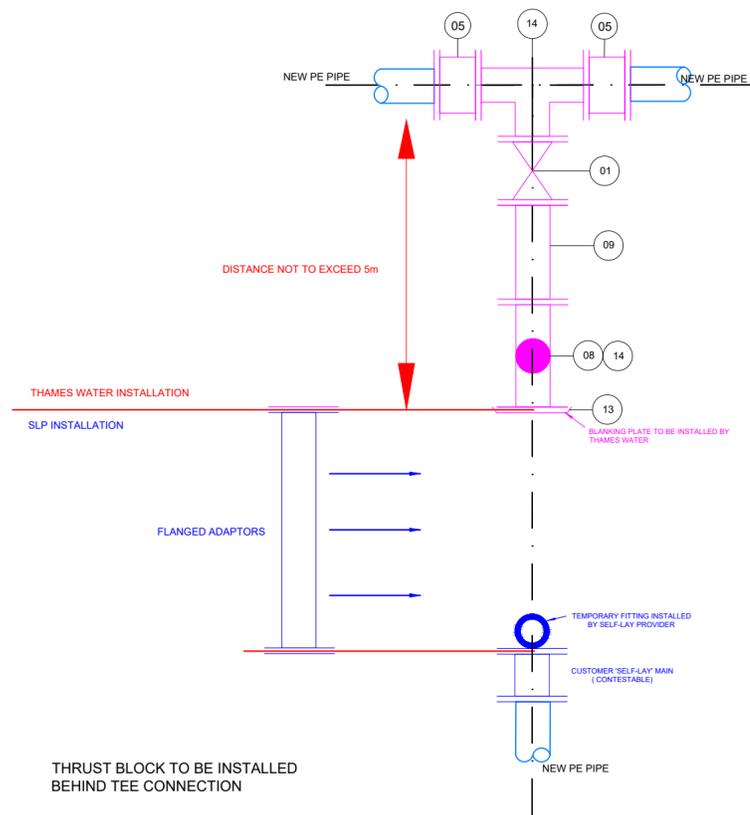

SCHEDULE OF PIPES AND FITTINGS		
MK	DESCRIPTION	QTY
01	SLUICE VALVE	1
05	FLANGED ADAPTOR	2
08	WASHOUT OR HYDRANT	1
09	FLANGED EXTENSION PIECE	1
13	BLANKING PLATE	1
14	ALL FLANGED TEE	2
16	FLANGED REDUCER (IF REQUIRED)	IF REQUIRED

GUIDANCE NOTES

- A. THIS DRAWING DETAILS BEST PRACTICE AND SHALL BE ADHERED TO WHERE EVER PRACTICABLE.DEROGATION TO THE CONTENT ON THIS DRAWING REQUIRES WRITTEN CONSENT FROM THE DEVELOPER SERVICES TECHNICAL LEAD.
- B. ALL MATERIALS SHALL BE COMPLIANT TO THE APPROPRIATE BS/WIS STANDARDS.
- C. EXTERNAL PROTECTION FOR BURIED FLANGE JIONTS,FLANGE ADAPTERS AND COUPLINGS SHALL BE TYPE P1 AS DEFINED IN CLAUSES 14 OF CESWI 6th EDITION,THIS PROTECTION SHALL COVER THE FLANGE AND ALL NUTS, BOLTS AND THREADS.
- D. THE PIPE MATERIAL FOR USE IN CONTAMINATED GROUND SHALL BE A THAMES WATER APPROVED BARRIER PIPE SYSTEM WHICH INCLUDES COMPATABLE PIPE FITTINGS,JOINT PROTECTION AND METER BOXES.

THE POSITION OF THE APPARATUS SHOWN ON THIS PLAN IS GIVEN WITHOUT OBLIGATION AND WARRANTY AND THE ACCURACY CANNOT BE GUARANTEED. SERVICE PIPES ARE NOT SHOWN BUT THEIR PRESENCE SHOULD BE ANTICIPATED. NO LIABILITY OF ANY KIND WHATSOEVER IS ACCEPTED BY THAMES WATER FOR ANY ERROR OR OMISSION. THE ACTUAL POSITION OF MAINS AND SERVICES MUST BE VERIFIED ON SITE BEFORE ANY WORKS ARE UNDERTAKEN.

THE DATA PROVIDED IS RELEVANT ONLY TO THE CURRENT PROJECT / ENQUIRY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSES.

TECHNICAL NOTES:

- 1.0 GENERAL
- 1.1 ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.
- 1.2 WASHOUTS SHALL BE INCLUDED TO THE RELEVANT BS/WIS STANDARDS.
- 1.3 FINAL ARRANGEMENT OF VALVES AND FITTINGS SHALL SUIT THE STREET ARRANGEMENT.
- 2.0 CHAMBER CONSTRUCTION DETAIL:
- 2.1 HEAVY DUTY DUCTILE IRON SURFACE BOX 430x280 CLEAR OPENING WITH THAMES WATER LOGO AND APPROPRIATE BADGE E.G WOOR FH.
- 2.2 430x280 CLEAR OPENING RECYCLED POLYMER CHAMBER SECTIONS.
- 2.3 THE SURFACE BOX SHALL BE POSITIONED SUCH THAT WHEN A KEY AND SANDPIPE ARE FITTED TO THE HYDRANT, EQUAL CLEARANCES EXIST AROUND THE SIDES OF THE BOX.
- 2.4 TYPE 1 BACKFILL WELL COMPACTED MINIMUM THICKNESS BELOW CHAMBER 300.
- 2.5 10mm SINGLE SIZE PEA SHINGLE BED SURROUND TO PIPE MINIMUM 150 ABOVE PIPE-REF DRAWINGS-DRG-WN-02020.
- 2.6 REINSTATEMENT LAYER.
- 3.0 PIPEWORK:
- 3.1 ALL FLANGE JOINT BOLTSET SHALL CONFORM TO WIS-4-52-02.
- 3.2 THE HYDRANT AND VALVE SHALL BE INSTALLED SO THAT THEY ARE TRULY PLUMB.
- 3.3 CONCRETE SUPPORT BLOCK SHALL BE CAST TO HYDRANT TEES AND SLUICE TEES.

Iss	Description	Dsgnr	Chkd	Appd	Date
A	FIRST ISSUE	PB	AB	AB	24/11/20



Thames Water Utilities
 DEVELOPER SERVICES
 CUSTOMER EXPERIENCE,
 CLEARWATER COURT,
 VASTERN ROAD,
 READING RG1 8DB
 TEL: 0800 009 3921
 EMAIL: DEVELOPER.SERVICES@THAMESWATER.CO.UK

ISSUE DATE: 01/01/2022	REVIEW DATE: 01/01/2024	SECURITY REF: PUBLIC	DRAWN BY: P.BHOOGAL
---------------------------	----------------------------	-------------------------	------------------------

PROJECT GROUP: DEVELOPER SERVICES

DATA OWNER: ASSET DEVELOPMENT

WATER NETWORK: STANDARD DRAWINGS

DS TECHNICAL LEAD: A.BELLIS

DRAWING TITLE: SELF-LAY SPUR CONNECTION OPTION B

DRAWING No.: DS-DRG-WN-0319	SCALE: N/A	SHEET SIZE: A2	REV: A
--------------------------------	---------------	-------------------	-----------

CAD DATE: 24/11/2020 CAD REV: 01